

Product Catalogue

For Sealing & Bonding



illbruck adds perfection.... to all your sealing and bonding projects. Whether it be windows, façades, interiors or exteriors, a major construction scheme or a minor refurbishment job - we offer the right set of products, services and expertise to lessen your workload and improve the overall climate of buildings. Making it perfect.

illbruck products ensure sustainable, top quality solutions. They meet all government requirements, help to lower energy consumption and contribute to a healthy living environment. The products are regularly checked by independent materials testing institutes for performance, durability, safety and adherence to low emission standards. This has resulted in numerous seals of approval for the different products as well for the company.

illbruck is a brand of tremco illbruck, a European manufacturer and service provider of high performance building materials.



illbruck

FM210

All Round Gap Filling

Foam



EN 204 D4 Bonds most materials even damp substrates Bonds irregular or uney substrates

illbruck illbruck SP350 FA120 Fix & Seal High Tack Building Silicone LMN NEUTRA



- 04 Service and Advice
- 06 The Faster Way to the Right Solution


Products

- 08 Silicone Sealants
- 11 Façade Sealants
- 14 Specialist & Other Sealants
- 16 **Ductwork Sealants**
- 17 Foams
- 21 Polyurethane Adhesives
- 23 Grab Adhesives
- 24 Hybrids
- 26 Super Glues
- 27 **Contact Adhesives**
- 28 Other Adhesives
- 29 **EPDM Sealing**
- 30 Tapes
- 35 Accessories
- 39 Other tremco illbruck sealants & adhesives
- 40 **Nullifire Fire Stopping Products**

Service and Support Quick assistance when you need it

Targeted services provide answers to all your questions - quickly, simply and for every phase of your project. Use the following overview to find the right service point for your queries.

I would like to ...

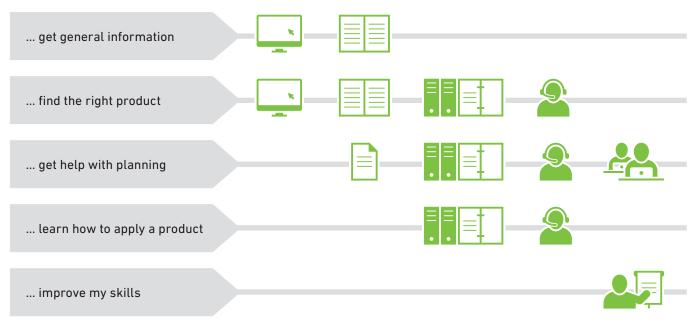



Website

The illbruck website has been restructured for faster access to all products. Moreover, it offers support in product selection, a continually growing range of best practice cases, and access to both digital and personal service.



Brochures

Brochures for building trades, merchants and specifiers provide practical examples of projects and applications, system solutions, services and product overviews.





Product Datasheets

Completely revised and clearly presented product datasheets provide all the technical information you need for each specific product. Datasheets are available in printed format or can be downloaded in digital format from our website.



Specification Services

The illbruck team can assist with specification writing including NBS Clauses. As members of NBS Plus, architects can easily incorporate illbruck products into their specifications with NBS Writer.

libruck



Training

illbruck training prepares you for the regular workday. Learn how to apply illbruck products professionally and efficiently. Discover new technologies and solutions. Benefit from the knowledge of our experts. Our product consultants can give you dates in your area.

<text></text>	Politica ma		ierr and adhesics based on seturate formulation.	- Aug					
Image: State				-					
	104		Patientia				libr	uck	
	Ewit						and the second se		
Image: The second s									
Image: The second s									
Image: Applie and applies Image: Applies Image: Applies Image: Applies Image: Applies Image: Applies Image: Applies Image: Applies									
Image: State									
		11100							
State		10.1.01	n						
Starting Start				\$9150					
Total Control Contro		11.1.1.1	1975			s.42266 eige.			
Barrier Barrier Barrier <				Fix & Seal		Ermalanare hallone			
Image: Processing of the section of the sec						and muchanously			
In the second									
Image: state									
 Test State State	-								
In the second s									
 The Target State State									
 The Target State State									
Marine									
And an an and an an and an an and an									
And an an and an an and an an and an									
State State <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>									
A series of the									
Water Amerikanski, Sama (Markar) 1 <									
Water Amerikanski, Sama (Markar) 1 <	 On materials such as place, eleminism, constrains, income and the second se								
Rad Marken Strand Stran	harpened assot, PAL apong and paryanet to protect								
11.5	Minut Tal	Anital Services							
 And And And And And And And And And And				Pri antenne					
And encoded and encode	lyplication (Task basis is in 					
And encoded and encode	+ Caroli and	i al drawitalda	a aharp limite, avoiding damaga	the second second					
And the second s									
				• Cat he many					
	heth surface	un. For large is	and arrays, spread the athenics						
Any sampling land to data it in takawa at u.f			at enable						
A design of the state of the st		and a second second	and here bit with some cost and						
A to an a final section of the								_	
All the second sec						Tar hard approach of the same factors with fractions	Names West works		
Mediana di la danda de constituti di la danza di									÷.
Markens gewas in Falseline Novae Markens gewas in Falseline Novae Name of the State of the Sta									
EXEMUTE EXEMUTE EXEMUTE EXEMUT							T LOS TRAD DE TRAD		÷
Residue Resident Textus discriminational de la del a d				124.00					
				header 1	NOR .		was had a direct of a		



Consulting and Planning

Faced with complicated projects, architects - as well as other specifiers and even installers - can turn to a team of experts for independent and detailed specification support.





Customer Service & Support

Calling our Customer Services will put you in touch with experienced experts – and not with an anonymous call centre voice. Since we strongly believe in personal communication, we invest in our face-to-face services in order to better serve your needs.





The faster way to the right solution Colours and shortcuts identify each product

illbruck has expanded its product range. From now on, you can find everything you need for sealing and bonding windows, façades, interiors and exteriors – all under one name: illbruck.

New colour-coding makes it even easier to find the product you need: Each application field has its own colour scheme

FM

and each technology its own shade of colour within this scheme. The colour code is always the same: in this catalogue, on the product or in all promotional materials!

As before, the technologies continue to be identified by a combination of letters (as part of the shortcut).





Adhesives

СТ	Contact
СҮ	Cyanoacrylate
МТ	Grab Adhesives
ОТ	Others
PU	Polyurethane
SP	Hybrid
WD	PVA

Foams



Membranes

ME



Profiles





Tapes

TN	Others
ТР	Impregnated



Accessories





In the picture - Faster Clear and informative packaging design

Fix & Seal Universal

The new and improved packaging design puts you in the picture faster. Precise and instantly recognisable colour shades and icons clearly identify each product. This labeling **Product overviews** runs throughout all forms of marketing materials - from packaging and website design to catalogues, brochures and in brochures product datasheets. **Product datasheet** Adhesives SP030 Fix & Se SP050 Fix & Sea illbruck Foams FM230 Pro For SP050 FM330 Pro Seal nes Universal HIGH POWER Area of application Simple pictograms explain where to apply the product. **Major benefits** A second type of pictogram erials r & exterior use will show the main benefits/ able nt & isocyanate properties at a glance. **Online product search** All 22 F Ad

Sealants







GS200 is a rapid curing, sanitary grade silicone sealant with excellent resistance to mould and mildew. It is ideal for applications in: bathrooms, showers and wet rooms, kitchens, changing areas and hospital sluice rooms.

Product Benefits

- Excellent resistance to detergents and cleaning
- Wide service temperature range: -50°C to +100°C
- Contains a powerful fungicide

Packaging

310 ml cartridges (20/carton)

Colours

Translucent and white

GS300 Glazing Silicone





GS300 is a high performance glazing silicone which forms a flexible and durable weather tight seal. It can be used for all classical glass and glazing applications.

Product Benefits

- · Meets the requirements of ISO 11600 G 20 HM
- Excellent adhesion to most glazing and frame materials
- Accommodates joint movement up to 20%

Packaging

310 ml cartridges (20/carton)

Colours

Translucent, white, aluminium, grey and black

GS360 Multi-Purpose Silicone



GS360 is a high performance construction silicone with excellent adhesion, long-term flexibility and weatherproof performance. It is suitable for a wide range of sealing applications, such as: plumbing, electrical, general building and maintenance.

Packaging

Colours

Product Benefits

- Bonds to many common construction materials
- Rapid curing and permanently flexible
- Excellent external weathering properties

Building Silicone



310 ml cartridge (20/carton)

Translucent, white, black,

brown, grey and light oak



FA120



FA120 is a low modulus, neutral curing silicone sealant which cures rapidly to form a permanently flexible, highly elastic, durable weather seal. It bonds well to most construction materials and is suitable for use in many demanding sealing applications such as: the perimeter sealing of PVCu window & door frames and for use in cold stores, kitchens & bathrooms.

Product Benefits


- Excellent adhesion to most building materials
- Cures rapidly to provide a permanent flexible seal
- Low modulus: accommodates high movement
- Contains powerful fungicide to resist mould growth

Packaging

310 ml cartridge (20/carton)

Colours

Translucent, white, brown, and black

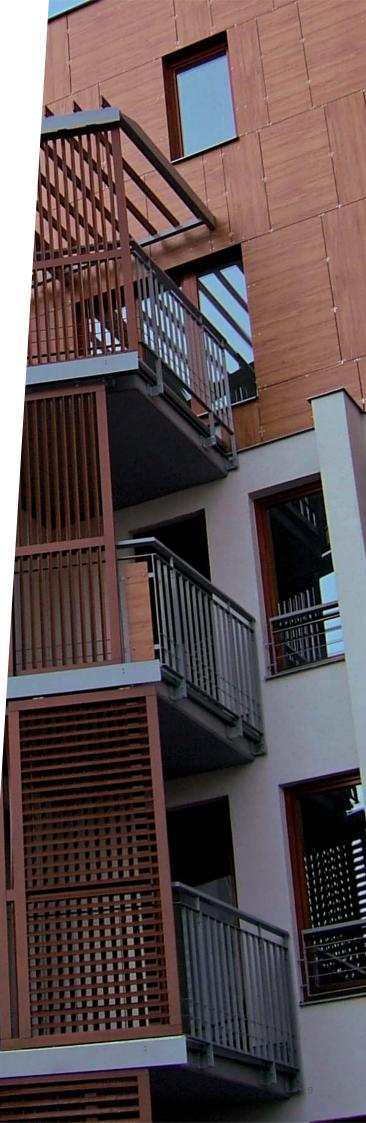

Silicone Sealants

FA600 Frame Silicone





FA600 cures rapidly to form a permanently flexible and extremely durable watertight seal. It is designed for sealing: window & door perimeters, windows, display cases, etc., as well as conservatories & greenhouses.

Product Benefits

- Meets the requirements of ISO 11600-F&G-25LM
- Long-term resistance to weathering, ageing and UV
- Wide Service Temperature Range: -40°C to +120°C

Packaging

310 ml cartridge (20/carton) 600 ml sausages (20/carton) subject to minimum order quantities.

Colours

Translucent, white, brown, grey and black. Other colours - subject to availability/minimum order quantity.

FS500

Frame & Façade Silicone





FS500 is a low modulus, neutral curing, silicone sealant with high movement capability. It has excellent adhesion to most porous and non-porous substrates including polycarbonate.

Product Benefits

- Meets the requirements of EN ISO 11600 G&F 25LM
- Movement capability: up to 50%
- Long-term resistance to weathering, ageing and UV

Packaging

310 ml cartridge (20/carton) 600 ml sausage (20/carton)

Colours

Black, white, brown, grey, anthracite, pine. Other colours subject to minimum order.



Specialist Façade Sealants

FA101 Premium Glazing Silicone





FA101 is a one part, neutral curing, low modulus, low odour silicone sealant for sealing around frames and glazing units. It demonstrates excellent primerless adhesion to many common building substrates such as glass, polyacrylate, polycarbonate, painted wood, varnished wood, anodised aluminium, and forms an excellent waterproof seal.

FA870

Premium Natural Stone Silicone

	- Č ///**
i se	20%



FA870 is a non-staining, neutral curing silicone sealant. It provides long term elastic sealing of connection and movement joints between natural stones such as granite, slate, terrazzo, porphyry, limestone, travertine, sandstone, quartzite, marble, etc. as well as for connection joints with other conventional materials like concrete, ceramics, metals, glass, PVC and primed wood.

FA880

Premium Natural Stone Silicone Matt





FA880 has been formulated for the long term elastic sealing of movement joints between natural stone such as granite, slate, terrazzo, porphyry, limestone, travertine, sandstone, quartzite, marble, etc., as well as for joints with other construction materials like concrete, ceramics, metals, glass, PVC and primed wood.

Product Benefits

- Abrasion resistant
- Long term resistance to weathering ageing and extra UV protection
- Neutral curing low odour and non-corrosive
- Easy to use
- · Contains fungicide

Packaging

310 ml cartridges (20/carton)

Colours

Transparent, pure white, middle brown and black

Product Benefits

- Non-staining formulation for natural stone
- Long-term resistance to weathering, ageing and UV
- Contains fungicide to prevent mould growth
- Rapid curing formulationskins within 10- 20 minutes

Packaging

310 ml cartridges (20/carton) 600 ml sausages (20/carton)

Colours

389 Transparent, 402 White, 084 Carrara White, 179 Grey White, 192 Joint Grey, 212 Licht Grau, 228 Manhattan, 211 Light Grey, 244 Middle Grey, 002 Agate Grey, 139 Dusty Grey, 303 Platinum Grey, 356 Slate Grey, 019 Anthracite, 053 Black, 330 Sandstone Beige Light, 189 Jasmine, 030 Bahama Beige, 332 Sandstone Beige, 200 Light Beige, 324 Sand, 081 Caramel, 225 Main Red, 099 Coco Brown

Product Benefits

- A high performance silicone sealant developed specifically for the sealing of natural stone whereby illbruck guarantees no migratory staining
- Superb matt finish
- Good resistance to UV light, ageing and weathering
- Contains fungicide to prevent mould growth
 suitable for sanitary & swimming pool surround applications
- Rapid curing formulationskins within 10- 20 minutes
- Chemically neutral, noncorrosive and very low odour
- Compatible with most construction materials

Packaging

310 ml cartridges (12/carton)

Colours

389 Transparent, 402 White, 194 Joint White, 192 Joint Grey, 212 Licht Grau, 211 Light Grey, 228 Manhattan, 326 Sand Grey, 366 Stone Grey, 139 Dusty Grey, 036 Basalt Grey, 105 Concrete Grey, 356 Slate Grey, 128 Dark Grey, 019 Anthracite, 053 Black, 189 Jasmine, 030 Bahama Beige, 013 Anemone, 324 Sand, 260 Oak, 129 Dark Oak, 071 Brown, 124 Dark Brown, 095 Chocolate Brown

Specialist Façade Sealants

FS125

Premium Frame & Façade Silicone





FS125 is a one-part, neutral curing, low modulus, low odour silicone sealant suitable for perimeter joint sealing applications with high movement capability. It has excellent primerless adhesion to multiple surfaces including masonry, brick, aluminium, PVC-U, polycarbonate, polyacrylate, wood, painted wood, glass and glazed surfaces.

Product Benefits

- Meets the requirements of EN ISO 11600 G&F 25LM
- Movement capability: up to 50%
- Long-term resistance to weathering, ageing and extra UV protection
- Low modulus formulation ensures minimum stress at joint faces
- Neutral cure: low odour and non-corrosive
- Modern colour range in low sheen finish
- Easy to tool into place and smooth off

Packaging

310 ml cartridges (20/ carton)

Colours

340 Signal Black, 409 White Ibiza, 065 Bronze, 068 Brown, 176 Grey Stone, 160 Grey, 365 Stone, 170 Grey Anthracite, 016 Anthracite, 447 Chartwell Green

SP525

Frame & Façade Sealant & Adhesive





SP525 is a low modulus sealant formulated using advanced SP polymer technology. It has high movement capability, excellent primerless adhesion to many substrates and long-term performance. It is ideal for: joints in facades, rainscreens & curtain walls, perimeter joints around windows, doors & rooflights and high movement joints (eg. modular building).

Product Benefits

- Meets the requirements of EN ISO 11600 F 25LM
- Formulation based on advanced SP polymer technology
- High movement, rapid curing and non-staining formulation
- Excellent long-term resistance to weathering, ageing and UV
- Low modulus formulation ensures minimum strain at joint faces

Packaging

600 ml sausages (20/carton)

Colours

White, light grey, mid grey, concrete grey, anthracite, black, portland (light sandstone) and sandstone



LD730 Acrylic Sealant





LD730 is a flexible, mould resistant acrylic sealant for use in painting and decorating. It provides an over-paintable seal for filling cracks and gaps around door and window frames, penetrations, damaged plaster and other wall and ceiling surfaces.

Product Benefits

- Ideal for filling and sealing small cracks and gaps throughout building interiors
- Over-paintable: will overcoat with a wide range of paints
- Solvent free: no unpleasant solvent odours, low toxicity
- Contains fungicide to prevent mould growth

Packaging

310 ml cartridge (25/carton) 380 ml cartridge (25/carton)

Colour White

SB660 Butyl Sealant



SB660 is a non-setting butyl sealant which provides a durable seal in low movement construction joints. It is intended for weather sealing lap joints in corrugated roofs, cladding, gutters and similar building elements.







FA160 Lead Sealant is specifically formulated for sealing lead flashings into chases cut into brick, stone and concrete around external building and roofing features. The product is chemically compatible with most construction materials and cures to give a finished joint that is superior to traditional mortar based solutions in terms of seal quality, lifetime, movement accommodation and appearance.

Product Benefits

- Non-setting formulation allows in-field jointing up to 6 months after application
- Provides an air tight seal in lap joints where low movement is expected
- Allows easy disassemble of joints during maintenance and inspection
- Excellent low temperature performance - flexible at temperatures as low as -20°C

Product Benefits

- Excellent adhesion to lead, masonry and brickwork
- Cures rapidly to provide a permanent flexible seal
- Long-term resistance to weathering, ageing and UV

Packaging

380 ml cartridge (25/carton)

Colour

Grey

Packaging

310 ml cartridge (20/carton)

Colour Lead grey







OS111 is a high performance, bituminous sealant and adhesive that can be applied on damp, wet or submerged substrates. It is ideal for sealing leaks and making repairs, even on wet surfaces.

Product Benefits

- Can be applied to damp, wet or submerged substrates
- Excellent adhesion to a wide range of materials
- Long-term resistance to weathering, ageing and UV

Packaging

310 ml cartridge (24/carton)

Colour Black

SP540 Floor Joint Sealant

SP540 Floor Joint Sealant is abrasion and vibration resistant, non-yellowing easy to tool, and both UV and weather resistant.

Product Benefits

- Isocyanate & silicone free
- Fast curing
- · Fast tack-free time
- Permanent elasticity
- High mechanical strength and good abrasion resistance
- Excellent resistance to weathering, ageing and UV
 exposure

Packaging

310 ml cartridge (12/carton) 600 ml sausages (20/carton)

Colours

Colours

Concrete grey and black

conins conins

Concrete grey and black

SP545

Flow Applied, Self-Levelling Flooring Sealant



Gunned into the joint and with little help, SP545 will level out to form a neat joint surface.

It can be used with most common substrates such as: concrete, steel, aluminium, fibre glass, etc.

Product Benefits

- Complies with ISO11600
 25LM
- Abrasion resistant
- Vibration resistant
- Non-yellowing
- UV and weather resistant
- Easy to toolUV exposure

Packaging

600 ml sausages (20/carton)

Ductwork Sealants

LD410 Duct Sealant





LD410 is a solvent free duct sealant which gives a flexible seal in low movement joints. It has been designed for permanent sealing in low, medium and high pressure ductwork.

Product Benefits

- Prevents air leakage in low, medium and high pressure ductwork
- Can be used to meet requirements of Class C to HVCA standard DW 144
- Water based: especially suited for safe use in confined spaces

Packaging

310 ml cartridge (25/carton)

Colour Grey

OS120 Duct Sealant





OS120 is a rapid curing duct sealant which gives a flexible seal in low movement joints. It has been designed for permanent sealing in low, medium and high pressure ductwork.

Product Benefits

- Prevents air leakage in low, medium and high pressure ductwork
- Can be used to meet requirements of Class C to HVCA standard DW 144
- Rapid curing allows fast track sealing of ductwork

Packaging

380 ml cartridge (12/carton)

Colour Grey

Gre

TN119 Flange Sealing Foam Tape



TN119 is a closed-cell, single sided PE foam tape used to provide an airtight seal around flange joints in HVAC ductwork.

Product Benefits

- A quick and easy way to achieve an airtight seal at ductwork connections, ideal for confined areas
- 100% closed-cell PE foam provides an airtight seal even under minimal levels of compression
- Meets the requirements of Building and Engineering Services Association DW 144 Class C

Standard Sizes

Thickness: 6 mm Widths: 15 & 25 mm

Colour

Grey

Foams

FM320 Expandable Foam



FFM320 is suitable for general gap filling, bonding and insulation applications. These include the perimeter sealing and fixing of windows and doors, sealing of service penetrations and sealing around insulation panels.

Product Benefits

- Ideal for filling, sealing and insulation of joints and gaps in a variety of building and construction applications
- Low post expansion improves accuracy of delivery, reduces foam wastage and minimises cutting time
- Rapid curing formulation: Foam is tack free within 10 minutes, and canbe cut or trimmed within 45 minutes

Packaging

750 ml pressurised canister (12/carton)

Colour Yellow

FM230 Pro Foam Window





FM230 is a one component, moisture curing, polyurethane foam which is gun-applied and is particularly suited for thermal and sound insulation around window and door frames.

Product Benefits

- Accommodates up to 35%
 movement
- Low post expansion
- Acoustic & thermal insulation

Packaging

750 ml pressurised canister (12/carton)

Colour White

Foams





FM610

Handy Foam



FM310 is suitable for general gap filling, bonding and insulation applications. These include the perimeter sealing and fixing of windows and doors, sealing of service penetrations and sealing around insulation panels.

Product Benefits

- Acoustic & thermal insulation
- High initial expansion
- Low wastage

Packaging

750 ml pressurised canister (12/carton)

Colour

Green

FM610 is suitable for general gap filling, bonding and insulation applications. These include the perimeter sealing and fixing of windows and doors, sealing of service penetrations and sealing around insulation panels.

Product Benefits

- Acoustic & thermal insulation
- High initial expansion
- Low wastage

Packaging

750 ml pressurised canister (12/carton)

Colour

Green

FM330 is a rapid curing, highly elastic gun grade polyurethane foam and is ideal for use as an air tight gap filler for general construction joints.

Product Benefits

- Helps achieve UK Building Regulations Part L
- Bonds to most common building materials
- Roofs Walls Floors

Packaging

750 ml pressurised canister (12/carton)

Colour

White

FM617 is a rapid curing, hand-held expanding polyurethane foam that is suitable for hard-to-reach gap filling, bonding and insulation applications.

Product Benefits

- Ideal for hard-to-reach
 joints
- Ergonomic cap for maximum control
- Seal and re-use cap

Packaging 540 ml pressuris

540 ml pressurised canister (12/carton)

Colour

Green



FM330





FM617 Handy Foam 360°





FM210 All Round Gap Filling Foam





FM210 is a B2 fire-rated gun grade general gap filling, bonding and insulating PU foam, which conforms to DIN 4102 - 1. FM210 is ideal for use in commercial and domestic applications and is a superb all season PU foam.

Product Benefits

Packaging

(12/carton)

750 ml pressurised canister

- Reduces the spread of fireResistant to decay, water
- and fire
- Good dimensional stability

Colour Green

FM510

All Round Gap Filling Handy Foam





FM510 is a B2 fire rated hand grade general gap filling, bonding and insulating PU foam, which conforms to DIN 4102 - 1. FM510 is ideal for use in commercial and domestic applications and is a superb all season PU foam.

Product Benefits

- Reduces the spread of fire
- Resistant to decay, water and fire
- Good dimensional stability

Colour Green

Packaging 750 ml cans (12/carton)



AA290 PU Solvent Cleaner



AA290 is a dual-purpose aerosol solvent based cleaner used to purge applicator guns and clean nozzles after PU foam applications. The spray nozzle adaptor can also be used to remove uncured PU foam from surfaces not affected by solvent.

Packaging 500 ml pressurised c

Colour Clear

500 ml pressurised canister (12/carton)



Foam Gun Standard



This high quality gun has been specially designed for the professional end-user. It is an ideal hybrid design with metal and thermoplastic material parts which is solvent and stick proof.



AA250 Foam Gun





This high quality gun has been specially designed for the professional end-user. It is an ideal hybrid design with metal and thermoplastic material parts which is solvent and stick proof.

Packaging Individual units

AA270 Foam Gun

Ultra



This ultra-high quality gun has been specially designed for the professional end-user. The hybrid design is solvent and stick proof. A PTFE coating on metal parts makes cleaning and maintenance easier.

Packaging Individual units

This high quality gun has been specially designed for the professional end-user. It is an ideal hybrid design with metal and thermoplastic material parts which is solvent and stick proof. The extra long barrel aids facilitates application in some difficult areas.

Packaging Individual units





Adhesives

PU012

Liquid PU Construction Adhesive





PU012 is a moisture cure, liquid PU adhesive that is designed for the bonding of most types of wood, sandwich panels, polyurethane panels and plywood.

Product Benefits

Interior & exterior

Packaging

use - EN 204 D4

- Bonds most materials even damp substrates
- Initial set in 20 minutes

750 g bottle (12/carton)

Colour Amber

PU220

Wood Adhesive **Rapid Set**





PU220 is a low viscosity PU adhesive designed for bonding wood to wood very rapidly, suitable for full water immersion, even in seawater.

Product Benefits

- Interior & exterior use - EN 204 D4
- Bonds most materials even damp substrates
- Gap filling action
- Fast Cure initial set in 6 -7 minutes

Packaging 500 ml (12/carton)

Colour Amber

Polyurethane Adhesives



Wood Adhesive **Rapid Set**



PU010

PU108

Joinery Adhesive

Panel Adhesive



PU230 is a thixotropic PU adhesive paste which cures rapidly to form an exceptionally strong water resistant bond.

Product Benefits

- Packaging · Interior & exterior use -310 ml cartridge (12/carton)
- EN 204 D4 • Bonds most materials even damp substrates
- Bonds irregular or uneven substrates
- · Fast cure initial set in
 - 6 -7 minutes

PU010 is a rapid curing gun grade polyurethane foam adhesive. Designed for panel fixing, PU010 is compatible with many common substrates such as: plasterboard, insulation, masonry, timber, concrete and metal.

Product Benefits

- Quick & easy alternative to mechanical fixings and mortars
- · Ready to use no mixing required
- Eliminates waste use what you need

Packaging

Colour

Translucent

750 ml pressurised canister (12/carton)

Colour Green

PU108 is a rapid curing gun grade polyurethane foam adhesive. An ideal product for use in joinery, furniture, carpentry, flooring and roofing installations.

Product Benefits

- Interior & exterior use - EN 204 D4
- Eliminates spills & minimises waste
- Up to 50% more coverage than a liquid PU adhesive

Packaging

700 ml pressurised canister (12/carton)

Colour

Beige

PU038 is a solvent free, two component, polyurethane based adhesive that is mainly used for the structural bonding of corner angles of aluminium windows and doors. Bonded parts can be powder coated afterwards.

Product Benefits

- Solvent free
- Thixotropic will not drip
- · Good weather resistance
- Easy to apply

Packaging

PU038 is available in 900 g kits (6 kits per carton).

Colour

Resin: white-beige Hardener: brown-beige Cured film: beige









Grab Adhesives

MT440 High Grip Original





MT440 is a highly versatile, high strength grab adhesive based on synthetic rubber and resins. It is ideal for a vast range of applications. MT440 has excellent adhesion to brick, concrete, blockwork, wood, plywood, chipboard, hardboard, plasterboard, insulation materials (except polystyrene), laminated plastics metals and ceramics.

Product Benefits

- High-power grab actionGap filling bonds uneven
- substrates
- Suitable for internal and external use

Packaging


310 ml cartridge (12/carton)380 ml cartridge (12/carton)

Colour

Buff

High Grip Solvent Free

MT480





MT480 has been developed to provide a water-based alternative to conventional grab adhesives. It offers the same gap filling and bonding performance, but without the issues surrounding solvent-based adhesives.

Product Benefits

- Fixes, fills, seals and bonds
- High-power grab action
- Solvent-free and very low odour

Packaging

380 ml cartridge (12/carton)

Colour White

СТ600

Sprayable Contact Adhesive





CT600 is a high strength contact adhesive in an easyto-use 500 ml handheld canister. It is ideal for quick and simple bonding of many common materials, including: wood, cardboard, fibrous insulation materials, paper, plastics, canvas, cork, rubber, fabrics and foam, either to themselves or onto brickwork, concrete, stone and plaster.

Product Benefits

- Very versatile, 3-in-1 adhesive action
- Use as a grab adhesive, contact adhesive or tackifier
- Quick and easy bonding with a vast range of uses

Packaging

500 ml canister (12/carton)

Colour Light yellow

Hybrids

SP030 Fix & Seal Crystal





SP030 is a transparent, fast-curing adhesive sealant based on illbruck's SP polymer formulation. SP030 cures rapidly to provide a flexible, crystal clear seal. The transparent properties of SP030 make it ideal for use in the sealing/ bonding of glass elements in a wide range of interior applications where a transparent bond is required.

Product Benefits

- Tack free within 5 minutes
- Solvent & isocvanate free - suited for safe use in confined spaces
- · Excellent adhesion to a variety of substrates

Packaging

310 ml cartridge (12/carton)

Colour Crystal clear

SP036 is a multi-purpose adhesive/sealant based on illbruck's advanced SP polymer formulation. SP036 provides a strong and flexible bond for typical fit out applications.

Product Benefits

- Bonds & seals most construction materials
- Over paintable once cured
- Suitable for internal and external applications
- · Resistant to weather and ageing

Packaging


310 ml cartridge (12/carton)

Colours

White, grey and black.

SP050

Fix & Seal Universal





SP050 is a multi-purpose sealant and adhesive based on illbruck's advanced SP polymer formulation. SP050 provides a high strength flexible bond in a wide variety of construction and industrial applications.

Product Benefits

- Bonds & seals virtually all materials
- Interior & exterior use - over paintable
- · Solvent & isocyanate free

Packaging

310 ml cartridge (12/carton)

Colours


White, grey and black. Other colours available subject to minimum order quantity. Crystal clear version

available (refer to illbruck SP030).



SP036

Adhesive & Sealant





SP350

Fix & Seal **High Tack**





SP350 is a single component polymer adhesive based on illbruck's advanced SP polymer formulation. With an extremely high initial strength, SP350 is ideal for bonding materials to floors, walls and ceilings.

Product Benefits

- Instant grab
- Bonds & seals virtually anything
- · Interior & exterior use over paintable
- Solvent & isocyanate free

Packaging 310 ml cartridges (12/carton)

Colour White


SP350

Fillbruck

Fix & Seal **High Tack**

High Tack Adhesive for Heavy Duty Bonding

INSTANT GRAB



- Bonds & seals virtually anything
- Interior & exterior use over paintable
- Solvent & isocyanate free





Super Glues

CY300

Industrial Super Glue



CY300 is a versatile, ready to use, transparent, solvent free, medium viscosity, cyanoacrylate adhesive which develops very rapid high strength bonds when used between close-fitting surfaces.

Product Benefits

- Bonds a wide range of materials
- Cures in less than 60 seconds
- Easy-to-use, non-toxic cyanoacrylate formulation

Packaging

20 g bottle (25/carton) 50 g bottle (25/carton)

Colour

Translucent

CY340 Mitre Kit Adhesive



CY340 is a 2-part kit comprising a high viscosity cyanoacrylate adhesive and a sprayapplied activator. The high viscosity adhesive has excellent gap-filling properties, whilst the activator accelerates curing speed and improves final bond strength.

Product Benefits

- Ideal for bonding mitred MDF joints
- 2-step application for an instant bond
- Ideal for MDF and woodbased products

Packaging

Kit contains 1 x 50 g bottle and 1 x 200 ml canister (12/carton)

Colour

Translucent

CY360

Super Glue Activator



CY360 is a cyanoacrylate activator supplied in an easy-to-use hand-held aerosol. It can be used in conjunction with any of the illbruck range of cyanoacrylate adhesives to create an instant high strength bond

Product Benefits

- Use with illbruck CY adhesives
- Accelerates speed of curing
- Improves adhesion on difficult substrates

Packaging

200 ml canister (12/carton)

Colour

Colourless

Contact Adhesives

CT704 Industrial

Contact Adhesive





CT704 is a very versatile multi-purpose contact adhesive, used in a wide variety of construction and industrial applications. It is simple to apply and dries to form a high strength bond with many materials, such as laminated plastic, decorative hardboard, plywood, metals and rubber.

Product Benefits

- Quick and easy to use Forms a high strength
- bond
- Excellent weather
 resistance

Packaging 5 litre tin

Colour Light brown

CT468

High Performance Contact Adhesive





CT468 is a high performance contact adhesive with good heat resistance. CT468 offers excellent adhesion to nonporous surfaces. Although primarily developed for bonding laminated plastics, it is equally suitable for unplasticized or low plasticizer content PVC and ABS sheeting, aluminium, steel, rubber and asbestos cement sheeting.

Product Benefits

- Excellent adhesion to porous and non-porous substrates
- High bond strength
- Excellent water resistance

Packaging

1 litre tin (12/carton)

Colour

Reddish brown

CT456

Sprayable Contact Adhesive





CT456 is a spray-applied contact adhesive ideal for laminating and postforming of plastic laminates. The adhesive has good temperature resistance, instant grab and high ultimate bond strength, so is suitable for even tight radii postforming. It is also used for bonding a wide range of materials, such as metals, expanded foams, plywood, OSB, particleboard, hardboard and plasterboard.

Product Benefits

- Very high initial grab and ultimate bond strength contact adhesive
- Improved atomisation allows immediate lay up, eliminates blooming and reduces odour
- Sprayable formulation allows high coverage rates and rapid application times to be achieved

Packaging 25 litre drum

Colours Available in red or natural

Other Adhesives

WD110 Universal PVA Adhesive





WD110 has been developed for use in general purpose bonding, sealing and priming and as an adhesion-improving additive in general construction applications.

Product Benefits

- Ideal for sealing, priming, bonding
- For dusty, flaky or porous substrates
- Excellent coverage rates

Packaging

5 litre bottle (4/carton)

Colour White liquid, dries translucent

WD120

Weatherproof PVA Adhesive





WD120 is a premium PVA adhesive suitable for internal and external applications where resistance to water is required.

Product Benefits

- Weatherproof meets EN 204 (D3)
- Cures to a transparent finish
- Quick, easy and clean to use

Packaging

1 kg bottle (12/carton) 5 kg bottle (4/carton) 25 kg drums

Colour

White liquid, dries translucent

ME220

Elastomeric EPDM Membrane



ME220 is an EPDM-based membrane used for sealing interfaces to provide airtight or weather tight seals. The material does not contain any solvents which could later migrate into adjacent surfaces.

Product Benefits

- High resistance to mechanical damage
- Excellent movement capability in both transverse and longitudinal direction
- Excellent weathering, ageing and UV radiation resistance

Colour Black

OT015

High Tack Membrane Adhesive





OT015 is a specially formulated high tack adhesive.

Product Benefits

- Permanent bonding of EPDM membranes
- Gap filling ideal for uneven substrates
- Excellent resistance to weather and UV

Packaging

600 ml sausage (12/carton)

Colour Black

CT113 EPDM Membrane Adhesive



CT113 is a viscous contact adhesive based on synthetic rubber and resins.

Product Benefits

- Permanent bonding of EPDM membranes
- Rapid curing formulation cures in 20 mins
- Excellent resistance to weather and UV

Packaging

4.7 kg pail

Colour Black



TN111 Trim Mounting Tape



A closed-cell, double-sided PE foam tape used for bonding lightweight trim and flashing around windows, doors and similar interior applications.

Product Benefits

- A quick and easy way to bond lightweight trim and flashing – gives an instant bond with no curing time
- High quality PSA adhesive bonds to almost all plastic surfaces to give a strong, permanent bond
- Excellent low temperature performance down to -40°C

Standard Sizes

Thickness: 1 & 2 mm Width: 10, 12, 15, 25, 20 & 25 mm

Colours White and black

TN119

Flange Seal Tape



A closed-cell, single sided PE foam tape used to provide an airtight seal around flange joints in HVAC ductwork.

Product Benefits

- A quick and easy way to achieve an airtight seal at ductwork connections, ideal for confined areas
- 100% closed-cell PE foam provides an airtight seal even under minimal levels of compression
- Meets the requirements of Building and Engineering Services Association DWW 144

Standard Sizes

Thickness: 6 mm Widths: 15, 19 & 25 mm

Colour

Grey

Conformance

HVCA standard DW 144 Class C



A closed-cell, single-sided PE foam tape with very high conformability, used as a spacer tape between dissimilar metals, or where absorption of vibration, shock or expansion/contraction are required.

Product Benefits

- Excellent Insulation performance against shock, vibration and movement
- Provides a barrier to thermal bridging, galvanic corrosion and acoustic transmission
- Easy to use no specialist tools or equipment required

Standard Sizes

Thickness: 2, 3, 4, 5, 6 & 8 mm Width: Cut to order

Adhesive

Single (SSP) or double (DSP) sided

Colour

Black



A closed-cell, single-sided PE foam tape with very high conformability, used as a spacer tape between dissimilar metals, or where absorption of vibration, shock or expansion/contraction are required.

Product Benefits

- A very cost-effective method of maximising security levels of externally beaded windows and doors.
- Securely bonds the glass unit into the frame making removal from outside virtually impossible

Standard Sizes

Thickness: 1, 2, 3, 4, 5 & 6 mm Width: Cut to order

Adhesive

Double sided (DSX)

Colour Black



A closed-cell, double-sided PE foam tape used for bonding mirrors to walls and panels in interior applications.

Product Benefits

- A combination of instant grab and high shear strength provides a fast and secure method of mirror fixing
- 100% closed-cell PE foam tape unaffected by moisture or vapour, even in high humidity areas
- High quality acrylic-based PSA adhesive ensures no chemical reaction with mirror backing

Standard Sizes

Thickness: 0.8 & 1.6 mm Width: 19 & 25 mm

Colour

White

Tapes

TN150

High Performance Bonding Tape



A high-performance, double-sided bonding tape used for permanent mounting of signage, fixtures and panels, and industrial fabrication/assembly applications.

Product Benefits

- High tack pressure sensitive adhesive gives high instant grab and a strong permanent bond
- A non-invasive alternative to mechanical fixings, avoiding penetration or damage of mounting surfaces
- Quick and efficient to use

 no odour, no drilling, no mixing, no waste

Standard Sizes

Thickness: 1 & 2 mm Width: Cut to order

Colours White and black

TN550 Security Glazing Tape PVC DSX



A high-performance, double-sided PVC foam tape used to provide high security glazing of externally beaded windows and doors.

Product Benefits

- A very cost-effective method of maximising security levels of externally beaded windows and doors
- Securely bonds the glass unit into the frame making removal from outside virtually impossible

Standard Sizes

Thickness: 2, 3, 4, 5, 6, 8 & 10 mm Width: Cut to order

Adhesive

Double sided (DSX)

Colours

Black and white* (*in 2 mm thickness only)

TN550 Security Glazing Tape PVC DST



A high-performance, double-sided PVC foam tape used to provide high security glazing of externally beaded windows and doors. The double thickness adhesive with tissue interlayer on the DST format is designed to prevent damage by the adhesive to sensitive substrates due to plasticiser migration.

Product Benefits

- A very cost-effective method of maximising security levels of externally beaded windows and doors
- Securely bonds the glass unit into the frame making removal from outside virtually impossible

Standard range

Thickness: 2, 3, 4, 5 & 6 mm Width: Cut to order

Adhesive Double sided (DST)

Colours

Black and white* (*in 2 mm thickness only)



A single-sided PVC foam tape with high conformability, used as an insulation tape to absorb vibration/shock, or where an acoustic seal is required.

Product Benefits

- Highly conformable grade of tape that easily accommodates rough or uneven joint surfaces
- Excellent insulation performance against shock, vibration and movement
- Provides a barrier to thermal bridging, galvanic corrosion and acoustic transmission

Standard Sizes

Thickness: 6 & 12 mm Width: Cut to order

Adhesive Single sided (SST)

Colour Black



A single-sided PVC foam tape which can be used either uncompressed (as an acoustic or dust seal), or 30% compression (as an air or weather seal).

Product Benefits

- Excellent insulation performance against shock, vibration and movement
- When under compression (30%), provides an effective weather seal against wind and rain
- Provides a barrier to thermal bridging, galvanic corrosion and acoustic transmission

Standard Sizes

Thickness: 2, 3, 4, 5, 6, 8 & 10 mm Width: Cut to order

Adhesive

Single sided (SSX)

Colours

Black and white* (in 2mm thickness only)

TN573 Sealing Tape P275



A single-sided PVC foam tape which can be used either uncompressed (as an acoustic or dust seal), or 30% compression (as an air or weather seal).

Product Benefits

- Excellent insulation performance against shock, vibration and movement
- Provides an effective weather seal against wind and rain, even under minimal levels of compression
- Provides a barrier to thermal bridging, galvanic corrosion and acoustic transmission

Standard Sizes

Thickness: 1 mm Width: Cut to order

Adhesive

Single (SSX) or double (DSX) sided

Colours

Black and white

Tapes

TN583 Sealing Tape P335



A specialist grade, double-sided PVC foam tape used in applications where a specific gap size must be maintained e.g. SSG, or in applications where high compressive strength is required.

Product Benefits

- High compressive strength grade of tape that retains dimensions – ideal for providing a consistent gap size
- Recommended by all major manufacturers of structural silicone glazing silicone as a spacer tape
- High compressive strength grade of foam suitable for heavy duty construction and industrial applications

Standard Sizes

Thickness: 6, 8 & 10 mm Width: Cut to order

Colour Black



TP600 is an impregnated joint sealing tape for use in a wide variety of movement joints and other applications. Weather tight against the most severe combinations of wind and rain, it satisfies most expectations as an external weather seal in building and civil engineering applications.

Product Benefits

- Weather seal for winddriven rain
- Breathable for vapour diffusion
- Continually expands and contracts to accommodate movement whilst still sealing the joints

Standard Sizes

Expanded thickness: 10, 15, 20, 25, 30 & 40 mm Width: Cut to order Refer to product datasheet for details

Colours

Grey and anthracite

Conformance

Standard Sizes

Expanded Thickness:

Width: Cut to order

10, 15, 20, 25, 30 & 40 mm

Refer to product datasheet

BBA Agrément Certificate 96/3309

TP605 Compriband Super



Acrylic impregnated foam sealant strip which when compressed by 80% provides a high performance weather seal (>600 Pa). Supplied in pre-compressed roll form and ready for immediate use with a self-adhesive backing. After positioning, the material expands to find its own level and creates a permanent elastic seal.

Product Benefits

- Withstands in excess of 600 Pa rain tightness
- Compatible with most sealants & construction materials
- Weatherproof & breathable

Colour Grey

Conformance

for details

BBA Agrément Certificate 95/3331

Accessories

AA290 PU Solvent Cleaner



Dual-purpose aerosol solvent based cleaner used to purge applicator guns and clean nozzles after PU foam applications. The spray nozzle adaptor can also be used to remove uncured PU foam from surfaces not affected by solvent.

Product Benefits

- High power cleaner for illbruck PU foams
- Fills most PU foam guns
- Dual-purpose cleaner/ aerosol

Packaging

500 ml (12/carton)

Colours Clear

AW403 Industrial Glass Cleaner



Fast evaporating solvent solution removes dirt from glass surfaces to leave a sparkling finish. Effectively cleans all types of glass, mirrors and tiles.

Product Benefits

- Powerful industrial cleaner for glass, mirrors and tiles
- Cleans to leave a sparkling crystal clear finish
- Suitable for windows, mirrors, tiles and certain metals

Packaging

1 litre (12/carton) 25 litre poly bottle

Colours Colourless

Accessories

AW404 PVCu Cream Cleaner





Mildly abrasive cleaner for PVCu window and door frames, laminates and other plastic surfaces. Removes heavy grime and light scratch marks. Buffs to a smooth glossy finish.

Packaging 1 litre (12/carton) **Colours** White

Effective solvent cleaner ideally suited for cleaning and removing stains and contamination from PVCu window and door frames during installation and for maintenance thereafter. It may also be used for cleaning other surfaces which are not sensitive to solvents such as metal, ceramics and glass.

Packaging 1 litre (12/carton) Colours Clear

AA292 is designed to clean wet and semi-cured paint, sealant, adhesives, bitumen, polyurethanes, expanding foams, polyester fillers and epoxies from hands, tools and surfaces.

Packaging 100 per tub (6 tubs per carton)

AA301 helps achieve a better finish on the sealant when tooling off. Just spray on the freshly gunned silicone and smooth off the sealant in the normal way with the smoothing tool. Far better than washing up liquid or common alternatives! Please note, when tooling natural stone, dip the tool in the liquid to avoid leaving water marks on the stone. One bottle of spray is extremely economical and will last a very long time.

Packaging

750 ml spray bottle (12/carton)

AA311 is a tooling kit contained in a small box. There are 3 tools with 6 different profiles to choose from in each box. They are made of high quality plastic to give an excellent finish.

Packaging 3 per box (6 different profiles)

AA400 can be sprayed onto mould to remove it, and will also prevent further mould from forming for a significant amount of time. If mould persists, please contact tremco illbruck technical department.

Packaging 500 ml spray bottle (12/carton)



Cleaning Wipes



AA301 Smoothing/Tooling Liquid



AA311 Jointing Tools







A high quality 10" metal skeleton gun for professional users. Able to accommodate 310 and 380 ml cartridges.

Packaging Individual units

High quality barrel gun for application of 600 ml foil sausages.

Packaging Individual units



AB005

AA936

Standard

Sausage Gun 600

Tape Roll Clips



Designed to clip onto the end of cut impregnated foam expanding tape to stop further expansion and avoid wastage. Keeps the roll tidy and neat and ready for use next time.

Packaging Individual units



Get a perfect cut everytime on illbruck membranes. Designed to cut cleanly and efficiently with a lock to keep the shears closed when not in use. The perfect tool for the professional.

Packaging Individual units

SEAM ROLLER

Membrane Rollers



The most efficient way of getting maximum contact when applying illbruck membranes. This handy roller allows a professional finish eliminating air bubbles and wrinkles and allowing the product to be applied "right first time".

Packaging Individual units

AA290 PU Solvent Cleaner



AA290 is a dual-purpose aerosol solvent based cleaner used to purge applicator guns and clean nozzles after PU foam applications. The spray nozzle adaptor can also be used to remove uncured PU foam from surfaces not affected by solvent.

Packaging

Colour

500 ml pressurised canister (12/carton)

Clear



Standard



This high quality gun has been specially designed for the professional end-user. It is an ideal hybrid design with metal and thermoplastic material parts which is solvent and stick proof.

Packaging Individual units

AA250

Foam Gun Pro



professional end-user. It is an ideal hybrid design with metal and thermoplastic material parts which is solvent and stick proof.

This high quality gun has been specially designed for the

Packaging Individual units

AA270 Foam Gun

Ultra



This ultra-high quality gun has been specially designed for the professional end-user. The hybrid design is solvent and stick proof. A PTFE coating on metal parts makes cleaning and maintenance easier.

Packaging Individual units

This high quality gun has been specially designed for the professional end-user. It is an ideal hybrid design with metal and thermoplastic material parts which is solvent and stick proof. The extra long barrel aids facilitates application in some difficult areas.

Packaging Individual units





Other Sealants



SG300 Spectrem 2 High Performance Silicone Sealant



TREMCO SG300 is a versatile, high performance silicone sealant which reacts with atmospheric moisture to produce a flexible silicone rubber seal, ideal for a wide variety of general purpose joint sealing and glazing applications including 2-sided structural bonding.

Product Benefits

- Exceptional weather resistance: Including UV and ozone exposure with an anticipated life of 30 years
- Movement capability: 25%
- Good adhesion without primer to most common substrates
- High adhesion strength
- Excellent gunnability: Through wide temperature range
- Stable curing system: Which assures product reliability
- Quick skin formation
- SG300 meets the requirements of EN ISO 11600 G&F 25HM

Packaging

310 ml cartridge (12 per case), 600 ml sausage (20 per case)

Colour Black

SHELL

Tixophalte Wet Seal & Fix



A professional bituminous adhesive and sealant with permanent flexibility giving superior adhesion, even under wet conditions. Has long-term resistance to weathering, ageing and UV and is the ideal solution where silicones, PUs, acrylics, hybrids, etc., cannot be used.

Product Benefits

- Ready-to-use, easy to apply
- Can be applied in wet conditions and even under water
- Good adhesion to most surfaces
- Can be used with asphalt, concrete, cement, brick, metal, glass & plastic

Packaging


310 ml cartridge (12 per case), 600 ml sausage (20 per case)

Colour Black

Nullifire Fire Stopping Products

FF170

Hand Held Fire Rated PU Foam





FF170 is a modified, single component, fire rated polyurethane foam that is designed to seal linear gaps throughout the fire rated areas of a building. It is certified to the latest British and European standards EN 1366-4, DIN 4102 Pt 1 (B1) and EN13501: Pt 2.

Product Benefits

- Up to 4 hours fire resistance
- Suitable for gaps width up to 30 mm
- Sets tack free in 10 minutes
- Easy to install and can be cut within 60 minutes


Colour

Red

Packaging 750 ml cans (12/carton)

FF197

Gun Grade Fire Rated PU Foam





FF197 is a modified, single component, fire rated polyurethane foam that is designed to seal linear gaps throughout the fire rated areas of a building. It is certified to the latest British and European standards EN 1366-4, DIN 4102 Pt 1 (B1) and EN13501: Pt 2.

Product Benefits

- Up to 4 hours fire resistance
- Suitable for gaps width up to 30 mm
- Sets tack free in 10 minutes
- Easy to install and can be cut within 60 minutes

Colour

Red

Packaging 750 ml cans (12/carton)

Fire Stopping Products

FS702

Water-Bourne Intumescent Acrylic



FS702 is a one-part fire resistant joint sealant. FS702 cures to give a firm, but flexible seal in low movement fire rated joints, to seal between joints in FB747 fire-rated coated batts, substrate to penetration service applications and pointing up

Used for sealing FB747 **Coated Fire Batts**

Acoustics up to 61 dB

Product Benefits

ETAG 026

• Can achieve up to 4 hours

in accordance with EN

1366-3, EN 1366-4 and

Ideal for sealing low

ioint fire resistance tested

movement joints-suitable

for gaps up to 50 mm wide Suitable for rigid and

- Air seal up to 600 Pa
- Single sided seal tested
- Easily paintable

flexible walls

Product Benefits

- Can acheive up to 5 hours joint fire resistance tested in accordance with EN 1366-4
- Accommodates up to 20% movement
- Suitable for gaps up to 50 mm wide
- Excellent unprimed adhesion
- Slump free with a long service life
- Seal ratio at 2:1 (10 mm width x 5 mm depth

Packaging

310 ml cartridges (12 per box) 600 ml sausages (12 per box)

Colour

White and grey

of penetration seals.

FS703

Neutral Cure. **Fire-Rated Silicone**



Fire resistant seal for high movement joints. For internal and external use in: joints in compartment walls and floors, seals in and around lightweight partitioning, gaps between frames and structures, bedding of fire door locks and hinges, around pipes and services, and at junctions of different materials.

FS705 Intumescent Sealant



FS705 is a graphite based product which when exposed to fire expands protecting penetrations including cables, cable bunches, cable trays, plastic and metallic pipes. FS705 maintains the integrity and insulation performance of the seal through masonry and plasterboard.

Product Benefits

- Certified to the latest British and European standards EN 1366-3 and EN 13501-2:2007
- Provides an effective barrier to the spread of smoke and fire for up to 2 hours
- Excellent toolability and low slump characteristics. No special tools required.
- Suitable for a wide range • of penetrating items and substrates

(12 per box) Colours

Packaging

(12 per box)

310 ml cartridges

600 ml sausages


White and grey

Packaging 310 ml cartridges (12 per box)

Colour Grey

Glossary

Benefits

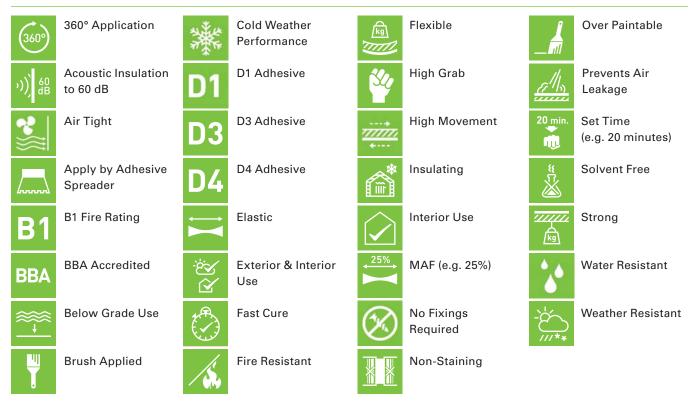

Certifications

ift

(Institute for Window Technology e.V.) ift Rosenheim is an internationally renown, scientific services company for the window & façades industry. ift Rosenheim focus on the verification of fitness for use, dependent on intended use, of the serviceable components of the building's fabric.

CE

CE Marking on a product is a manufacturer's declaration that the product is assessed before being placed on the market and thus satisfies the legislative requirements (e.g. a harmonised level of safety) to be sold there. It means that the manufacturer has verified that the product complies with all relevant essential requirements (e.g. safety, health, environmental protection requirements) of the applicable directive(s).



CE

i3

'i3' Window Sealing System is our assurance that the product is part of the state of the art, ift - approved and guaranteed 'i3' sealing system. This system fulfils the EnEV requirements with regards to airtightness.

13

BBA

The BBA is the UK's major authority offering approval and certification services to manufacturers and installers supplying the construction industry.


BBA Approval is recognised by building control, government departments, architects, local authorities, specifiers, and industry insurers like the NHBC.



tremco illbruck and its strong brands



tremco illbruck is a European manufacturer and service provider of high-performance sealing, bonding, flooring, waterproofing, and passive fire protection for the construction and manufacturing industries. We ensure that your processes become faster, smarter, more efficient. And more enjoyable. Every time.

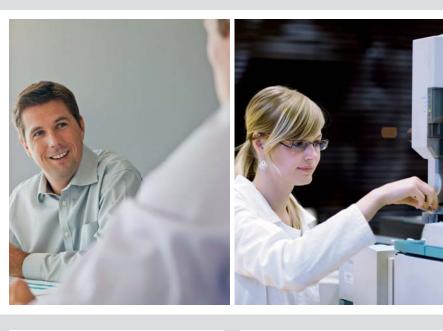



illbruck adds perfection – to all your sealing and bonding projects. Be it windows, façades, interiors or exteriors, a major construction scheme or a minor refurbishment job. We offer the right set of products, services and expertise to lessen your workload and improve the overall climate of buildings. Making it perfect.



Nullifire

Nullifire is at the forefront of smart passive fire protection. For over 40 years, it has been a market leader in intumescent and fire stopping solutions.

At Nullifire, we understand the need to have confidence in fire protection, so we provide systems that perform when they are called upon. With a unique team of technical experts, everything is focused on providing what our customers need - smart protection.



TREMCO

TREMCO delivers lasting results when it comes to flooring, waterproofing, insulating glass or structural glazing. The building envelope is faced with ever more exacting requirements – technologically, legally and in terms of sustainability. With more than 85 years of experience, TREMCO offers products that have been tested for decades and under extreme environmental conditions – for buildings that are made to last.



lssue 4 - 2016-10



tremco illbruck Limited Coupland Road, Hindley Green WIGAN WN2 4HT UK

T. +44 1942 251400 F. +44 1942 251410 info.uk@tremco-illbruck.com www.tremco-illbruck.co.uk