

Cl/SfB		Yt3	
CAW Z20			
Uniclass L6739:P7112			

## Description

PU010 is a rapid curing gun grade polyurethane, collapsing foam adhesive.

## Colour

Green

## Packaging

750 ml canisters (12 per carton)

## Technical Information


Characteristic	Standard	Classification
Composition		Polyurethane Foam
Fire Class	DIN 4102	B1
Density	LAB 015	15 - 25 kg/m <sup>3</sup>
Open Time	LAB 014- 3 cm in width at 23°C and 50% RH	6-8 minutes
Tack Free Time	FEICATM 1014	10 minutes
Cutting Time	FEICATM 1005	35 minutes
Loading Time		3 hours
Tensile Strength	FEICATM1018	75 kPa
Shear Strength	FEICATM 1012	51 kPa
Thermal Conductivity		36 mW/m.K
Application Temperature		Canister: +10°C to +30°C Ambient: +5°C to +35°C
Service Temperature		Short term: -40°C to +130°C Long term: -40°C to +90°C
Storage	Store in shaded, dry conditions between +10°C and +25°C Store canisters upright	
Shelf Life	12 months when stored as recommended in original, unopened containers	

## Preparation

- Always carry out a test to confirm compatibility prior to use.
- Protect floor coverings with paper or a plastic film.
- The surfaces must be dry, solid, stable and capable of carrying the load of the panels to be installed.
- Remove all loose particles, dust and grease.
- A speedier cure can be attained by moistening the substrates if needed.

## Application

- Shake the canister vigorously at least 20 times. Remove the protective cap and screw onto the illbruck PU foam gun.
- For internal applications: Starting at the middle of the panel, apply a bead of PU010 adhesive across the full width of the board or panel and repeat every 300 mm.
- For external applications (EIFS): Apply a bead of PU010 Panel Adhesive around the perimeter of the surface to be bonded. Then across the full width of the board or panel at 300 mm intervals.
- For best results always work with the canister in a vertical position and keep the valve pointed downwards.
- Move the panel into place and press firmly to ensure a good contact. Hold in position for 2-3 minutes, heavier panels may require additional support during curing.



## PU010

## Panel Adhesive



## Usage / Purpose

PU010 is a rapid curing gun grade polyurethane adhesive. It is ideal for the rapid installation of plasterboard, insulation or acoustic panels, EIFS, roof decking and similar sheet materials. PU010 is compatible with many common substrates including masonry, concrete, timber and metal.

## Key Benefits

- An easy to use alternative to mortars and dry wall adhesives
- Ideal for bonding plasterboard, insulation and EIFS panels
- Forms a high strength bond after just 40 minutes
- Expands to fill gaps, cavities and uneven surfaces
- Compatible with a wide range of common building substrates

PU010

## Panel Adhesive

**illbruck**  
making it perfect.

### Coverage


A single canister of PU010 is sufficient to bond approximately 5 m<sup>2</sup> of panel.

### Cleaning

Remove excess adhesive immediately with AA290 PU Foam Cleaner. Ensure surface is solvent resistant before cleaning. Cured adhesive can only be removed mechanically.

### Health & Safety Precautions

Safety data sheet must be read and understood before use.

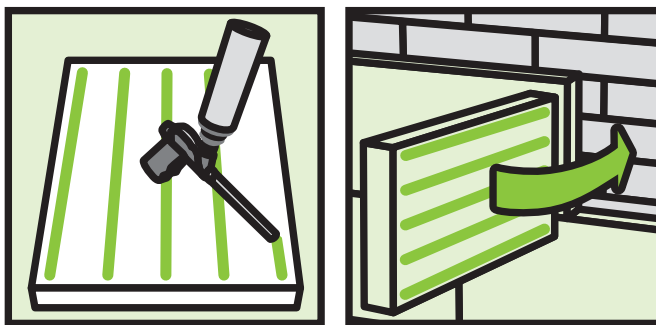

**BASA**

### Technical Service

tremco illbruck has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products.

For more detailed information, service and advice, please call Customer service on 01942 251400.

### Guarantee / Warranty

tremco illbruck products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with tremco illbruck written instructions and (b) in any application recommended by tremco illbruck, but

which is proved to be defective, will be replaced free of charge.

No liability can be accepted for information provided in this leaflet although it is published in good faith and believed to be concerned. tremco illbruck Limited reserves the right to alter product specification without prior notice, in line with Company policy of continuous development and improvement.

**tremco  
illbruck**

tremco illbruck LLC  
W2 B4 • DIRC • DIP 2  
PO Box 450539  
Dubai • UAE  
T: +971 4 8852403  
F: +971 4 8854872

mecsu@tremco-illbruck.com  
www.tremco-illbruck.com